

HYUNDAI

25 kVA ~ 200 kVA
PF 1.0

**Highlights**

- High power factor 1.0
- High efficiency 96%
- High power density
- 3-level technology
- 2 U power module
- Power flexibility from 25 – 200 kW
- Scalability & Modular hot-swappable
- Low total cost of ownership

This Series modular UPS is ideal for reliable, saving, intelligent and easy solutions. It ensures that a scalable, secure, high quality power supply is available for any critical high-density computer and IT environment applications, such as data centers and other critical loads.

This Series (25 kVA ~ 200 kVA) UPS is a high-end modular UPS with latest dual-core DSP control technology. It adopts a highly intelligent modular design which mainly contains power modules, bypass module and control module, all modules support “plug & play” to simplify UPS servicing and maintenance. The available UPS power and redundancy level can expand vertically from 25 kVA / 25 kW to 200 kVA / 200 kW in one single power cabinet with flexible configuration for meeting different needs. Based on superior electrical performance, perfect hardware and software protection function, EA660 Series UPS can adapt to different grid environment and provides maximum protection and high quality power for critical loads in data centers or other important applications.

Features

- Advanced dual-core DSP control technology
- True On-line, double conversion power protection, and with strong load capacity
- Compact footprint, modular Hot-swappable design simplifying maintenance and scalability
- High efficiency up to 96% in on-line mode, 99% efficiency in ECO mode
- Dual input design, independent bypass available, improving bypass availability
- Output power factor 1.0, input power factor ≥ 0.99 , input THDi $\leq 3\%$, output THDv $\leq 1\%$
- 138 ~ 485 Vac wide input voltage range, 50 Hz / 60 Hz grid self-adaptive
- Frequency conversion available: 50 Hz input / 60 Hz output or 60 Hz input / 50 Hz output
- Advanced digital parallel technology, improving redundancy and reliability in system
- Compatible with lead-acid battery and lithium battery, suitable for different types of battery configuration requirements
- Support cold start with battery and auto restart with mains power
- Settable delay time for startup when the mains power is restored, reducing the impact on the grid or generators
- Fan speed varies intelligently with temperature, reducing noise and extending the service life of the fan
- Fault-tolerant design for fan system, taking 35% loads when any one of fans fails
- Superior hardware and software protection function, robust self-diagnostic function, and abundant event log
- Hibernation function to improve the system efficiency at light loads and extend the service life of UPS
- Powerful background software for parameters configuration and online updating
- 7 inches LCD touch screen, friendly human-machine interface
- Multi-platform communications: RS232, RS485, CAN, NET, dry contacts, SNMP, Wi-Fi and GPRS communication interfaces; Real-time monitoring UPS available through the mobile App after installing Wi-Fi card and GPRS card
- Intelligent battery management, automatic floating/equalizing charge control, battery self-diagnosis control, SOC detection, SOH detection and charger hibernation control, extending battery lifespan



Available Options

Parallel cables, LBS cables, Battery temperature sensor, Wi-Fi card, GPRS card, EMD and SMS alarms





Power Module



- ① Run indicator ② Alarm indicator ③ Fault indicator
- ④ Ready switch ⑤ Output port ⑥ Input port

| | |
|-----------------------------|----------------------------|
| Dimensions (W x D x H) (mm) | 442×620×86 |
| Weight (kg) | 20.26 kg |
| Charging current | 10 A |
| Capacity | 25 kVA / 25 kW |
| Power density | 17.2 W / inch ³ |


Bypass Module



- ① Run indicator ② Alarm indicator ③ Fault indicator
- ④ Ready switch ⑤ Signal terminal ⑥ Power terminal

| | |
|-------------------------|------------------|
| Dimensions (W×D×H) (mm) | 442×500×130 |
| Weight (kg) | 18 kg |
| Capacity | 200 kVA / 200 kW |

Control Module

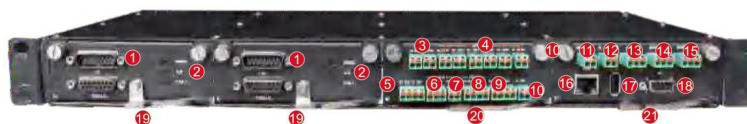

- ① LBS connection port/rack parallel port ② LED indicator ③ Input dry contacts ④ Output dry contacts ⑤ Battery ground fault (BTG) interface/ generator (GEN) interface
- ⑥ Generator (GEN) port ⑦ Battery circuit breaker (BCB) port ⑧ EPO port ⑨ Switch state port of distribution cabinet ⑩ SPD port
- ⑪ Ambient temp port ⑫ Battery temperature compensation port ⑬ CAN port ⑭ R485 port 1 ⑮ R485 port 2 ⑯ Ethernet port
- ⑰ USB port ⑱ LCD port ⑲ lug-in switch of system control boards ⑳ Plug-in switch of dry contacts board ㉑ Plug-in switch of monitoring board

Specifications

| MODEL | HD-25RM4 | HD-25RM6 | HD-25RM8 |
|-------------------------------------|---|------------------|------------------|
| Rated capacity | 100 kVA / 100 kW | 150 kVA / 150 kW | 200 kVA / 200 kW |
| Number of power module | 4 | 6 | 8 |
| Rated capacity of power module | 25 kVA / 25 kW | | |
| INPUT | | | |
| Input wiring | Three-phase five-wire (3Φ + N + PE) | | |
| Rated voltage | 380 / 400 / 415 Vac | | |
| Voltage range | 138 ~ 305 Vac (linear derating at 40% ~ 100% load), 305 ~ 485 Vac (no derating) | | |
| Frequency range | 40 ~ 70 Hz | | |
| Input power factor | ≥ 0.99 | | |
| THDi | ≤ 3% | | |
| Bypass input voltage range | -60% ~ +25% (settable) | | |
| Battery voltage | ± 240 Vdc | | |
| Number of battery | 40 pcs 12 V batteries | | |
| OUTPUT | | | |
| Output wiring | Three-phase five-wire (3Φ + N + PE) | | |
| Rated voltage | 380 / 400 / 415 Vac | | |
| Output voltage regulation accuracy | ±1% | | |
| Output frequency accuracy | Synchronized with utility in mains power mode; 50 Hz / 60 Hz ± 0.1% in battery mode | | |
| Output power factor | 1 | | |
| Output waveform distortion (THDv) | ≤ 1% (linear load); ≤ 4% (non-linear load) | | |
| Crest factor | 3:1 | | |
| Overload capacity | 105% < load ≤ 110% for 60 min, 110% < load ≤ 125% for 10 min, 125% < load ≤ 150% for 1 min, load > 150% for 0.2 s | | |
| SYSTEM | | | |
| Max. efficiency | 96% in on-line mode, 99% in ECO mode | | |
| Transfer time | 0 ms | | |
| Max. number of parallel connections | 2 | | |
| Protections | Short-circuit - overload - over-temperature - battery low voltage - undervoltage - overvoltage - fan failure protection | | |
| Communications | Standard configurations: RS485 CAN, NET, SNMP, dry contacts port, and EPO Optional configurations: Wi-Fi card, parallel port, LBS port, GPRS card, Battery temperature sensor, EMD and SMS alarms | | |
| Display | 7 inches LCD touch screen | | |
| ENVIRONMENTAL | | | |
| Operating temperature | 0℃ ~ 40℃ | | |
| Storage temperature | -25℃ ~ +55℃ (without battery) | | |
| Relative humidity | 0% ~ 95% (non-condensing) | | |
| Altitude | ≤ 1000 m, above 1000 m, derating 1% for each additional 100 m | | |
| Protection level | IP 20 | | |
| Noise | ≤ 65 dB (at 1 m) | | |
| OTHERS | | | |
| Cabinet dimensions(W x D x H)(mm) | 600×850×1200 | 600 x 850 x 2000 | |
| Cabinet weight(kg) | 180 | 280 | |
| Module dimensions(W x D x H)(mm) | 442 x 620 x 86 | | |
| Power module weight(kg) | 21 | | |
| Color | Black | | |

● All specifications are subject to change without notice.