

RACKMOUNT UPS

10kVA

PF 0.9/1.0

Features

- Advanced DPS and 3-level technology with online double conversion technology
- Output Power factor 0.9/1.0 (optional)
- Active power factor correction (APFC), input power factor up to 0.99
- High efficiency 95% (up to 98% in ECO mode)
- Wide input range (110~288Vac) and frequency range (40~70Hz)
- Two modes of frequency conversion: 50Hz input/60Hz output or 60Hz input/50Hz output
- Hot swappable battery for built-in battery series
- VRLA (Sealed lead-acid maintenance free battery) with 3 years battery life
- High charging current (optional for KRS series)
- Intelligent/Advanced battery management (ABM), automatic floating/equalizing charge control, charger dormancy control, increasing battery life by 50%
- Linear derating in low voltage input reducing battery discharging time, extending the service life of battery
- Ability to switch on the UPS with batteries
- Settable delayed start time when mains power is restored, reducing the impact on power grid or generator
- Fan speed varies intelligently with temperature, reducing noise and extending its service life
- Equipped with self-aging function
- Compact internal layout, miniaturized the complete unit for small footprint
- LCD +LED display, multi-functional keys operation, friendly human-machine interface. LED display warning with sound and flash when UPS overload, connect battery failure and low battery

Display panel can be rotated 90°.

- Powerful background software for parameters configuration
- Effective software and hardware protection function, self-diagnostic function, robust abundant even log for check

Available Options:

- EPO, RS232 and smart slot included
- Optional parallel function, SNMP card, USB, RS485, Dry contact

Rear panel


1. Fans
2. Parallel (optional)
3. RS232
4. EPO
5. USB (optional)
6. Temperature Compensation (optional)
7. GRD
8. Bypass breaker
9. Terminal and Cover
7. Battery pack




LCD can be rotated



6-10KRS



6-10KRi

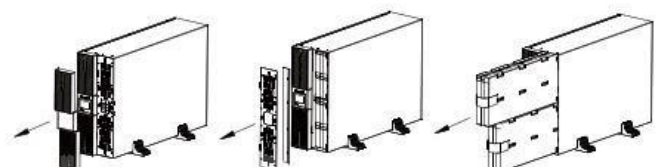

Easy for maintenance, hot-swappable battery for KRi series

Rear panel

MODEL	HD-6KRi	HD-6KRS	HD-10KRi	HD-10KRS
Capacity (KVA/W)	6kVA/5400W 6kVA/6000W		10kVA/9000W 10kVA/10000W	
INPUT				
Input wiring	Single phase (1PH + N + PE)			
Rated voltage	208/220/230/240VAC			
Voltage range	110-176 Vac (linear derating between 50% and 100% load); 176-288 Vac (no derating)			
Rated frequency	50/60Hz (auto – sensing)			
Frequency range	40-70 Hz			
Power factor	≥0.99			
Bypass voltage range	-40% - +15% (settable)			
THDi	≤ 3%			
OUTPUT				
Output wiring	Single phase (L-N)			
Voltage	208 (PF0.9)/220/230/240VAC			
Voltage regulation	± 1%			
Frequency	Synchronized to bypass in mains mode; 50/60 Hz ±0.1Hz (battery mode)			
Waveform	Pure sine wave			
Power factor	0.9/ 1.0 (optional)			
THDv	≤1% (linear load); ≤4% (non-linear load)			
Crest factor	3:1			
Overload	105% - 110% for 10 min; 110% - 125% for 1 min; 126% - 150% for 30s			
BATTERIES				
DC voltage	192VDC (192-240VDC settable)			
Inbuilt battery	16*12V7Ah	/	16*12V9Ah	/
Back up time 50% load	≥10mins	/	≥9mins	
Charging current	KRi: 1A; KRS: 5A (default). 1-5A settable, 12A (optional)			
Recharge time	KRi: 90% capacity restored in 8h; KRS: Depend on the battery capacity			
SYSTEM				
Efficiency	≥94% at 100% load, max. 94.5% at 60% load; ≥98% in ECO mode			
Transfer time	0ms			
Protections	Short-circuit, overload, overtemperature, battery low voltage, overvoltage, undervoltage and fan failure			
Max. number of parallel connections	4			
Communications	EPO, RS232 (Standard), USB/ RS485/ Dry contacts/ SNMP (optional)			
Display	LCD+LED			
OTHERS				
Operation temperature	0 – 40°C			
Storage temperature	-25 – 55°C (without batteries)			
Relative humidity	0 – 95% (non-condensing)			
Altitude	≤ 1000m, derating 1% for each additional 100m			
IP rating	IP 20			
Noise level at 1m	≤ 55dB		≤ 58dB	
Dimensions (W*D*H),mm	KRi: 440*660*176 (4U); KRS: 440*580*88 (2U)			
Net weight (kg)	58	12	63	14

- All specifications are subject to change without notice
- Custom-made specifications are acceptable